



Baoli

KBE 25-35

KBE 25-35Li



1.1	Manufacturer		KION BAOLI
1.2	Manufacturer's type designation		KBE 25Li G1
1.3	Drive: electric, diesel, petrol, fuel gas		Electric
1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated
1.5	Rated capacity / Rated load	Q (t)	2.5
1.6	Load centre distance	c (mm)	500
1.8	Load distance, centre of drive axle to fork	x (mm)	464
1.9	Wheelbase	y (mm)	1455
2.1	Service weight	Kg	3967
2.2	Axle loading, laden front/rear	Kg	5651/816
2.3	Axle loading, unladen front/rear	Kg	1495/2472
3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		S/E
3.2	Tyre size, front		23X9-10
3.3	Tyre size, rear		18x7-8
3.5	Wheels, number front/rear (x = driven wheels)		2x/2
3.6	Tread, front	b10 (mm)	1040
3.7	Tread, rear	b11 (mm)	950
4.1	Tilt of mast/fork carriage forward/backward	α/β (°)	6/10
4.2	Height, mast lowered	h1 (mm)	2068
4.3	Free lift	h2 (mm)	150
4.4	Lift	h3 (mm)	3000
4.5	Height, mast extended	h4 (mm)	3995
4.7	Height of overhead guard (cabin)	h6 (mm)	2150
4.8	Seat height/stand height	h7 (mm)	1174
4.12	Coupling height	h10 (mm)	660
4.19	Overall length	l1 (mm)	3320
4.20	Length to face of forks	l2 (mm)	2320
4.21	Overall width	b1/b2 (mm)	1265
4.22	Fork dimensions ISO 2331	s/e/l (mm)	45x100x1000
4.23	Fork carriage ISO 2328, class/type A, B		II A
4.24	Fork carriage width	b3 (mm)	1040
4.31	Ground clearance, laden, below mast	m1 (mm)	102
4.32	Ground clearance, centre of wheelbase	m2 (mm)	120
4.34.1	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	3660
4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	3860
4.35	Turning radius	Wa (mm)	1996
4.36	Internal turning radius	b13 (mm)	553
5.1	Travel speed, laden/unladen	km/h	15/15
5.2	Lift speed, laden/unladen	m/s	0,280/0,450
5.3	Lowering speed, laden/unladen	m/s	0,430/0,470
5.8	Max gradeability, laden/unladen	%	18/20
5.10	Service brake		Mech/Hydr
6.1	Drive motor rating S2 60 min	kW	10.2
6.2	Lift motor rating at S3 15%	kW	11.5
6.4	Battery voltage/nominal capacity K5	V/Ah	80 / 277
6.5	Battery weight	kg	230
6.6	Energy consumption according to VDI cycle	kWh/h	5,0
10.1	Operating pressure for attachments	bar	170
10.7	Sound pressure level at driver's seat	dB (A)	65

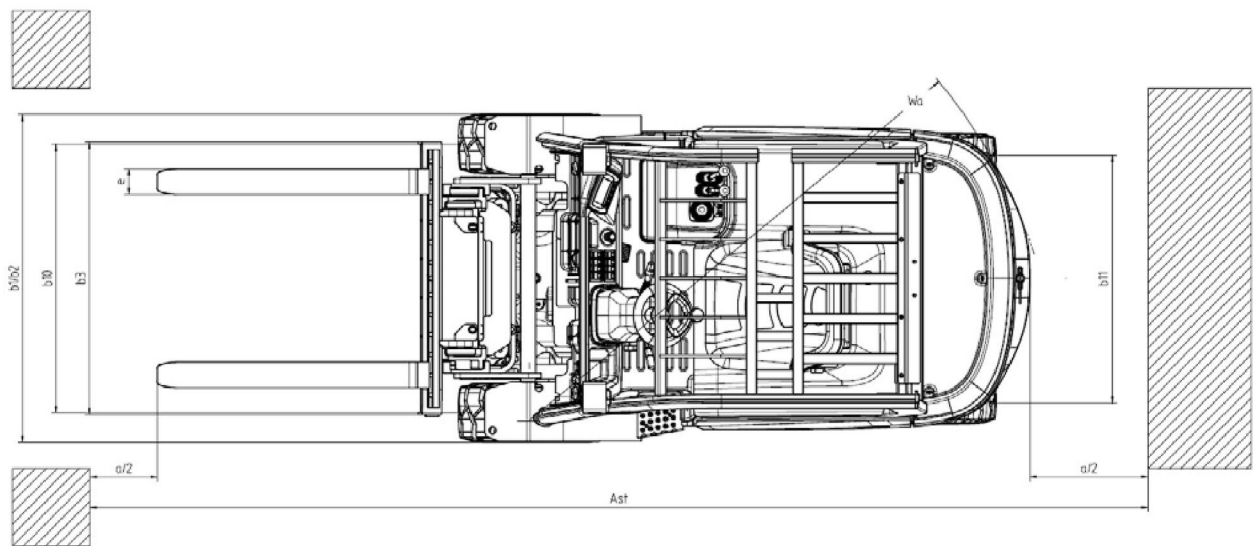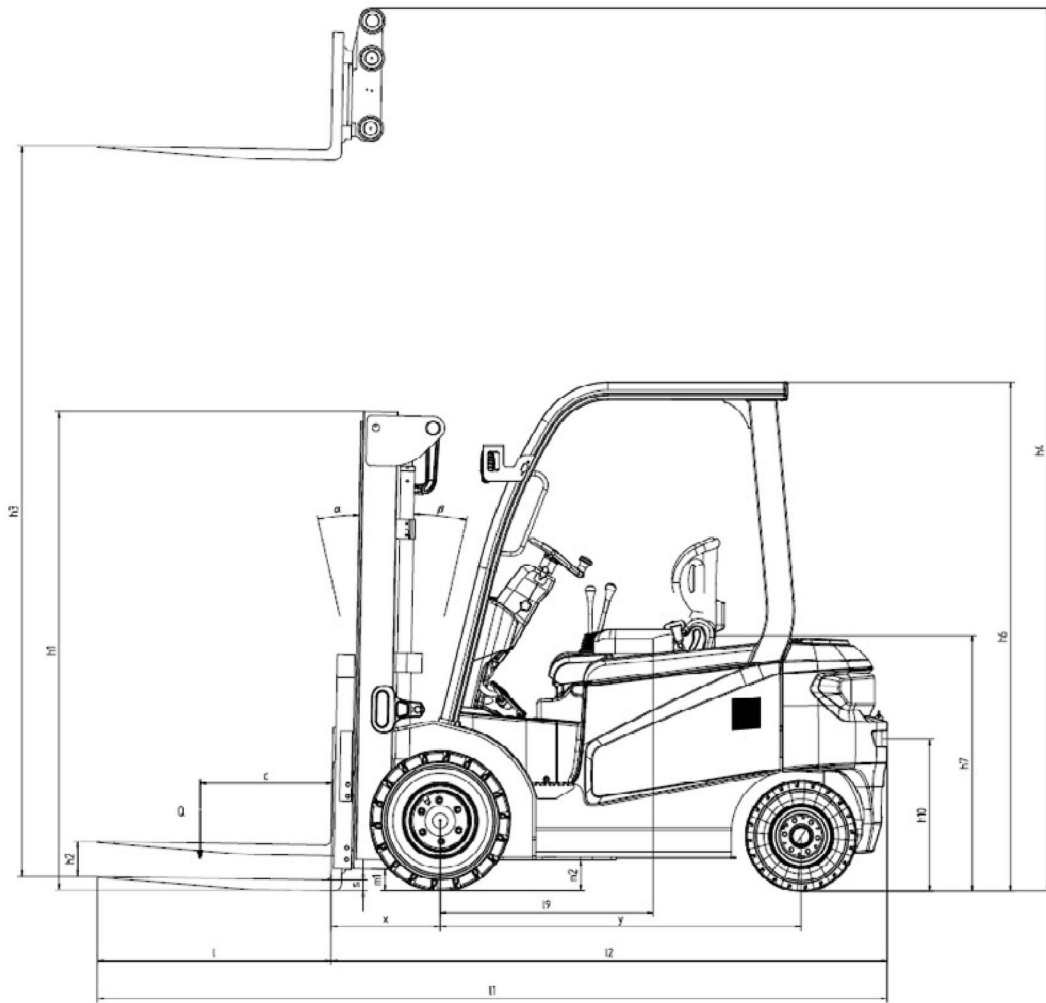

KBE 25Li G1

Mast type	H3	Capacity - Load center 500 mm	Capacity - Load center 500 mm - with IntegSideshift	Capacity - Load center 500 mm - with Hang on Sideshift	H1	H4	H2	Tilting angle Front/back
VM Tele	3000	2500	2500	2200	2058	3639	150	6/10
	3300	2500	2500	2200	2208	3939	150	6/10
	3500	2500	2500	2200	2308	4139	150	6/10
	4000	2500	2350	2060	2608	4639	150	6/10
	4500	2270	2040	1770	2858	5139	150	6/6,5
	5000	1930	1730	1480	3108	5639	150	6/6,5
VFM 2 stage	3000	2500	2500	2200	2023	3639	1385	6/10
	3300	2500	2500	2200	2173	3939	1535	6/10
	3500	2500	2500	2200	2273	4139	1635	6/10
	4000	2500	2350	2060	2573	4639	1935	6/10
	4500	2270	2040	1770	2823	5139	2185	6/6,5
VFHM triplex	4350	2280	2070	1800	2073	4989	1435	6/10
	4650	2120	1910	1660	2173	5289	1535	6/6,5
	4850	2010	1800	1560	2273	5489	1635	6/6,5
	5000	1930	1720	1480	2323	5639	1685	6/6,5
	5500	1660	1460	1240	2573	6139	1935	6/6,5
	6000	1390	1190	990	2823	6639	1985	6/6,5
	6500	1150	950	750	3023	7139	2385	6/6,5

KBE 25-35 KBE 25-35Li



The KBE 25-35 series is the perfect truck for all standard applications, bringing together productivity, high quality and cost effectiveness.

Manufactured in the „state-of-the-art“ KION production plant in Jinan, the KBE 25-35 is available with load capacities of 2,5, 3,0 and 3,5 t and is the perfect choice for almost all industries.

The solid workmanship combined with an uncompromising attention to the CE regulation, ensure a solid quality truck for customers whose safety is always a priority.

The newly designed mast, up to 6,5 meters high, ensures operators a very precise handling control and an excellent view of the load and surroundings.

The latest-generation KION controller manages the truck's functions, drawing the power from 80V/360-450Ah (2,5t) and 80V/500-600Ah (3,0-3,5t) batteries.

The KBE 25-35 is also available with lithium-ion batteries (80V/277-412Ah) as option.

Lithium batteries are virtually maintenance-free as don't need to be topped with water and increase the truck availability because short interim charging are allowed.

In addition, while the hydrogen produced by lead-acid batteries during charging can turn into dangerous gases, lithium-ion batteries eliminate this risk.

High quality electric motors and hydraulic components and the easy-to-read display, which provides the driver important information about the truck's status, guarantee additional comfort and reliability.

For smooth servicing procedures, the truck provides easy access to all components. The KBE features a newly developed diagnostics tool, operated via an app on a smartphone.

Technology

- ✓ Maintenance-free AC technology
- ✓ New generation KION controller
- ✓ Lithium-ion battery available: increased truck availability, no maintenance, no hazardous gases during charging
- ✓ High quality electric motors and hydraulics components
- ✓ 3 selectable driving programs: economy, efficiency, performance
- ✓ New diagnostic tool operated with a mobile phone thanks to the KEYS app
- ✓ Regenerative braking
- ✓ Robust mast options: two stages, two stages free lift, three stages free lift
- ✓ Fork speed reduction when lowering
- ✓ Hang-on or integrated side-shifter: fast loading and unloading
- ✓ High visibility LED lights
- ✓ Foot-activated parking brake

Ergonomics and driver's workplace

- ✓ Perfect visibility in all directions thanks to optimized mast and overhead guard sections
- ✓ Very comfortable and spacious operator compartment
- ✓ Standard overhead guard retrofittable to half and full cabin
- ✓ Electronic driving direction selector
- ✓ Very spacious footplate
- ✓ Storage compartments and USB ports for charging mobile devices
- ✓ Half and full cabin availability

- ✓ Color screen display with full information on truck status
- ✓ Side hydraulic levers
- ✓ Adjustable seat and steering column

